

**GLASSWARE**  
AUDIO DESIGN

# I2B4 CCDA

## **Constant-Current-Draw Amplifier**

All-In-One Stereo PCB

## **USER GUIDE**

Introduction  
Overview  
Schematics  
Recommended Configurations  
Power Supply Design  
Assembly Instructions

APR 04 2011

# DANGER!

This PCB holds a high-voltage power supply; thus, a real—and possibly—lethal shock hazard exists.

Ideally, a variac should be used to slowly power up the regulator, as it is better to have a mis-oriented electrolytic capacitor or a mis-located resistor blow at low voltages, rather than at high voltages. Remember that the danger increases by the square of the voltage; for example, 200 volts is four times more dangerous than 100 volts and 400 volts is sixteen times more dangerous.

Once the power supply is powered up, be cautious at all times. In fact, even when the power supply is disconnected or shut down, assume that power-supply capacitors will have retained their charge and, thus, can still shock. If you are not an experienced electrical practitioner, before attaching the transformer windings to the board, have someone who is well-experienced in electronics review your work.

There are too few tube-loving solder slingers left; we cannot afford to lose any more.

**GlassWare**  
**AUDIO DESIGN**  
[www.glass-ware.com](http://www.glass-ware.com)  
[www.tubecad.com](http://www.tubecad.com)

[sales@glass-ware.com](mailto:sales@glass-ware.com)

Copyright © 2011  
All Rights Reserved

## Warning!

This PCB contains a high-voltage power supply; thus, a real and lethal shock hazard exists. Once the power transformer is attached, be cautious at all times. In fact, always assume that the high voltage capacitors will have retained their charge even after the power supply has been disconnected or shut down. If you are not an experienced electrical practitioner, before applying the AC voltage have someone who is experienced review your work. There are too few tube-loving solder slingers left; we cannot afford to lose any more.

## Overview

Thank you for your purchase of the GlassWare 12B4 CCDA stereo PCB. This FR-4 PCB is extra thick, 0.094 inches (inserting and pulling tubes from their sockets won't bend or break this board), double-sided, with plated-through heavy 2oz copper traces. In addition, the PCB is lovingly and expensively made in the USA. The board is 7 by 6 inches, with five mounting holes, which helps to prevent excessive PCB bending while inserting and pulling tubes from their sockets.

Each PCB holds two 12B4 CCDA (constant-current-draw amplifier) line-stage amplifiers (four 12B4s); thus, one board is all that is needed for stereo unbalanced us). By including the necessary components for the heater and high voltage B+ power supplies on the PCB, the 12B4 CCDA board makes building a standard-setting line stage amplifier a breeze.

## PCB Features

**B+ and Heater Power Supplies** On the 12B4 CCDA board, two power supplies reside, one for the high-voltage B+ for the tubes and a low-voltage power supply for the heaters. The high-voltage power supply uses an RC filter to smooth away ripple, while the low-voltage power supply uses a voltage regulator to provide a stable and noise-free voltage output. The heater regulator is adjustable and can be set to 6V or 12V. The power supplies require an external power transformer(s) with two secondary windings (120Vac to 260Vac and 12Vac to 12.6Vac).


**Redundant Solder Pads** This board holds two sets of differently-spaced solder pads for each critical resistor, so that radial and axial resistors can easily be used (radial bulk-foil resistors and axial film resistors, for example).

**Dual Output Coupling Capacitors** Select between two coupling capacitors at the output. In addition, most capacitor locations find many redundant solder pads, so wildly differing-sized coupling capacitors can be placed neatly on the board, without excessively bending their leads.

**Power-Supply-Decoupling Capacitors** The 12B4 CCDA PCB provides space for two sets of capacitors to decouple both 12B4 CCDA gain stages from the B+ connection and each other. This arrangement allows a large-valued electrolytic capacitor and small-valued film capacitor to be used in parallel, while a series voltage-dropping resistor completes the RC filter. (As an option, in place of the R17 series resistor, an off-board choke can be used for each channel.)

## Introduction to the CCDA Circuit

The Constant-Current-Draw Amplifier is a compound circuit that holds a grounded-cathode amplifier directly cascaded into a cathode follower. So what; what's so special about this obvious pairing? Its special status lies in the details. Each triode sees the same cathode to plate voltage and the same load resistance and same idle current draw. Each sees the same signal voltage swings. Both grounded-cathode amplifier and the cathode follower are in voltage phase, but not current phase. For example, as the grounded-cathode amplifier sees a positive going input signal, its plate current increases, which increases the voltage developed across the plate resistor, which in turn swings the plate voltage down. This downward voltage swing is then cascaded into the grid of the cathode follower, which decreases the plate current to the same degree that the previous stage's current increased. This results in the constant current draw feature of this topology (a highly desirable feature, as the signal amplification will not alter the amount of current being sourced from the power supply and consequently not perturb the power supply, thus greatly simplifying the design consideration of the power supply).

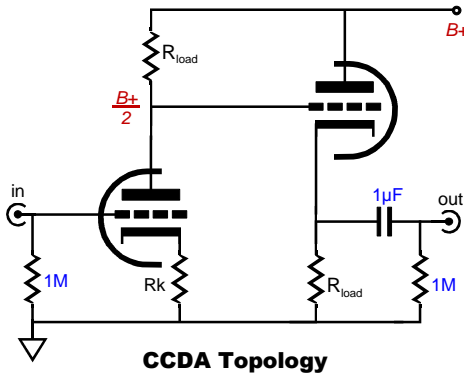

A line stage is needed either to boost a weak signal voltage sufficient to drive a power amplifier to full output, or to deliver current sufficient to drive a high capacitance load (such as long stretches of interconnect). Just how much gain is needed for a line amplifier? Let's begin the answer with the observation that most line amplifiers have too much gain. (After all, many audiophile run passive line-stage setups, which offer no voltage gain.) While this extra gain impresses the audio neophyte who marvels at the power implicit in the distorted thunder that a mere one quarter twist of the volume knob provokes, it ultimately only subtracts from the useful range of turn on the volume and usually only worsens the signal-to-noise ratio of the line stage. If 20 to 30 dB of gain is too much, how much then is best? The answer will depend on each system. A safe guess, however, would be 6 to 20 dB of gain, which translates into 2 to 10 times the input signal.

Calculating the gain from a CCDA amplifier is easy, when the cathode resistor is left un-bypassed, as the gain roughly equals half the mu of the input triode used. For example, the 12B4 presents a mu of 6.5, so the gain will equal about 3 (+9.5dB), not 3.5 due to losses in the cathode follower.

$$\text{Gain} = \mu R_a / (r_p + R_a + [\mu + 1]R_k)$$

And since we wish to split the B+ voltage at the input tube's plate,

$$R_a = r_p + (\mu + 1)R_k$$

Thus, the gain formula reduces to

$$\text{Gain} = \mu R_a / 2R_a$$

which further reduces to

$$\text{Gain} = \mu/2$$

**12B4 CCDA PCB** Obviously, on this PCB many more components have been added to the basic CCDA circuit. R2 and R4 are grid-stopper resistors and are essential, particularly for the cathode follower output stage. The added diode is also essential, as it protects the second triode at startup, when the cathodes are cold and the cathode follower's cathode sits at 0V and its grid sees the full B+ voltage— never a good idea, as the cathode can see portions of its surface ripped away by the huge voltage differential. C1 & C2 are the output coupling capacitors. C3 and C4 are power supply filtering capacitors which, with resistor R8, define a simple RC filter. R5 (the extra cathode resistor) is optional, although highly recommended, as it buffers the cathode follower's output from heavily-capacitive loads and it increases the cathode follower's linearity, but at the cost of increased output impedance.

**Super low output impedance is essential, isn't it?** In order to avoid insertion loss and frequency droop, a low output impedance is absolutely necessary isn't it? Well, it depends. Consider that cheap OpAmps such as the LM741 have amazingly low output impedances because of the high feedback ratios they run; yet they can't drive low impedance loads because they are output current limited. Yet a discrete transistor line amplifier— with higher output impedance (because of less feedback) and a greater output current capability— may drive the same low impedance load extremely well. So which was the more crucial factor: low output impedance or high current output?


Of course, if the power amplifier presents an extremely-low load impedance, a low output impedance will be needed just to preserve signal level, but not necessarily to preserve bandwidth, as any cable capacitance would effectively be countervailed by the load's own low impedance. No, the real threat to bandwidth comes from high impedance loads, which are bogged down by the high capacitance (because of long interconnects and the power amplifier's own input capacitance); and when this capacitance cannot be charged and discharged quickly enough, poor bandwidth results. The key words in the previous sentence were "charged" and "discharged." Charging a capacitor quickly requires current. The quicker the charging, the greater the current flow. The formula is a simple one: Current = Slew Rate x Capacitance or

$$I = SR \times C,$$

where slew rate refers to the amount of voltage that must be developed within a certain amount of time. Therefore, in order to guarantee wide bandwidth, the line stage must be capable of delivering a fairly high current at its output.

**Isn't phase inversion bad?** The 12B4 CCDA inverts the signal polarity and phase inversion to be avoided at all costs...right? No, unless you can't reverse the positive/negative connections of the speaker cable to the power amplifier. Line stage phase inversion just needs a screwdriver to fix. If the line amplifier inverts the phase and the power amplifier doesn't, then invert the speaker's phase. If the line amplifier inverts the phase and the power amplifier also inverts, then don't invert the speaker's phase.

Unlike the Aikido circuit, which delivers a perfect platform for tube rolling, as vastly different tubes can be swapped in and out of the board (6AQ8 or 6H30) without having to change the resistor values, the 12B4 CCDA requires more care in selecting resistor values. The problem is the daunting array of different possible B+ voltages and idle currents. For example, a 12B4 CCDA might run a B+ voltage of only 100Vdc or as much as 300Vdc. Moreover, the plate resistor cannot be the little 1/2W devices that the Aikido freely uses, but big 2W (or 3W) power resistors, which are hard to find and expensive. The solution the problem of too many resistor combinations is to let the idle current move, but lock the plate and cathode resistor values. A triode with a cathode and plate resistors acts like a resistor, not a perfect resistor, but a fairly good one.

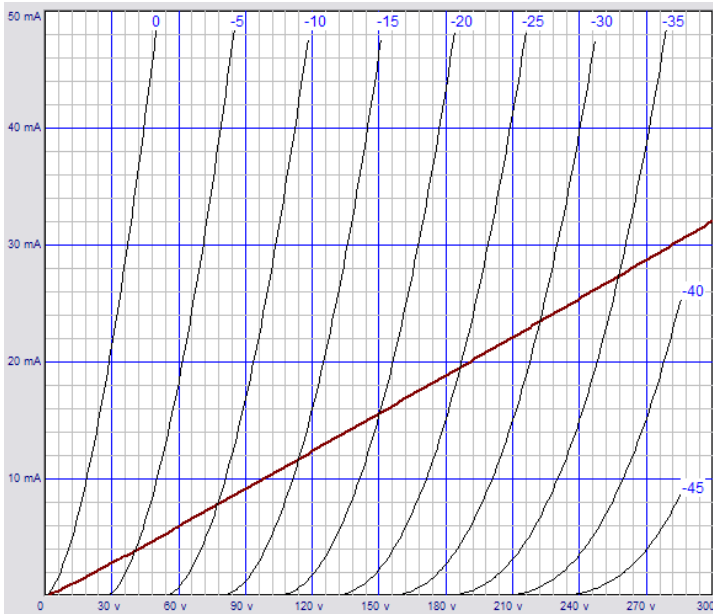

As the graph above reveals, a 12B4 triode with a 1000-ohm cathode resistor (no plate resistor) behaves much like a 9.4k resistor. (By the way, note the much improved linearity over the plate curve lines, albeit at the cost of greatly increased plate resistance and reduced transconductance.) Adding a plate resistor also makes the triode behave more like a good resistor. The formula for the effective resistance is:

$$R = r_p + R_a + (\mu + 1)R_k.$$

The upshot is that if we chose plate and cathode resistors values to work at the middle of possible B+ voltages, these same resistors will still split the B+ voltage across a wide range of B+ voltages. In other words, we can use a wide range of B+ voltage with the same cathode and plate resistor values.


In general, the following formula is a good starting point:

$$R_k = (R_a - r_p) / (\mu + 1)$$

# GlassWare Audio Design


Input RCA Jacks  
Isolated with shoulder-washers from chassis

Output RCA Jacks  
Isolated from chassis

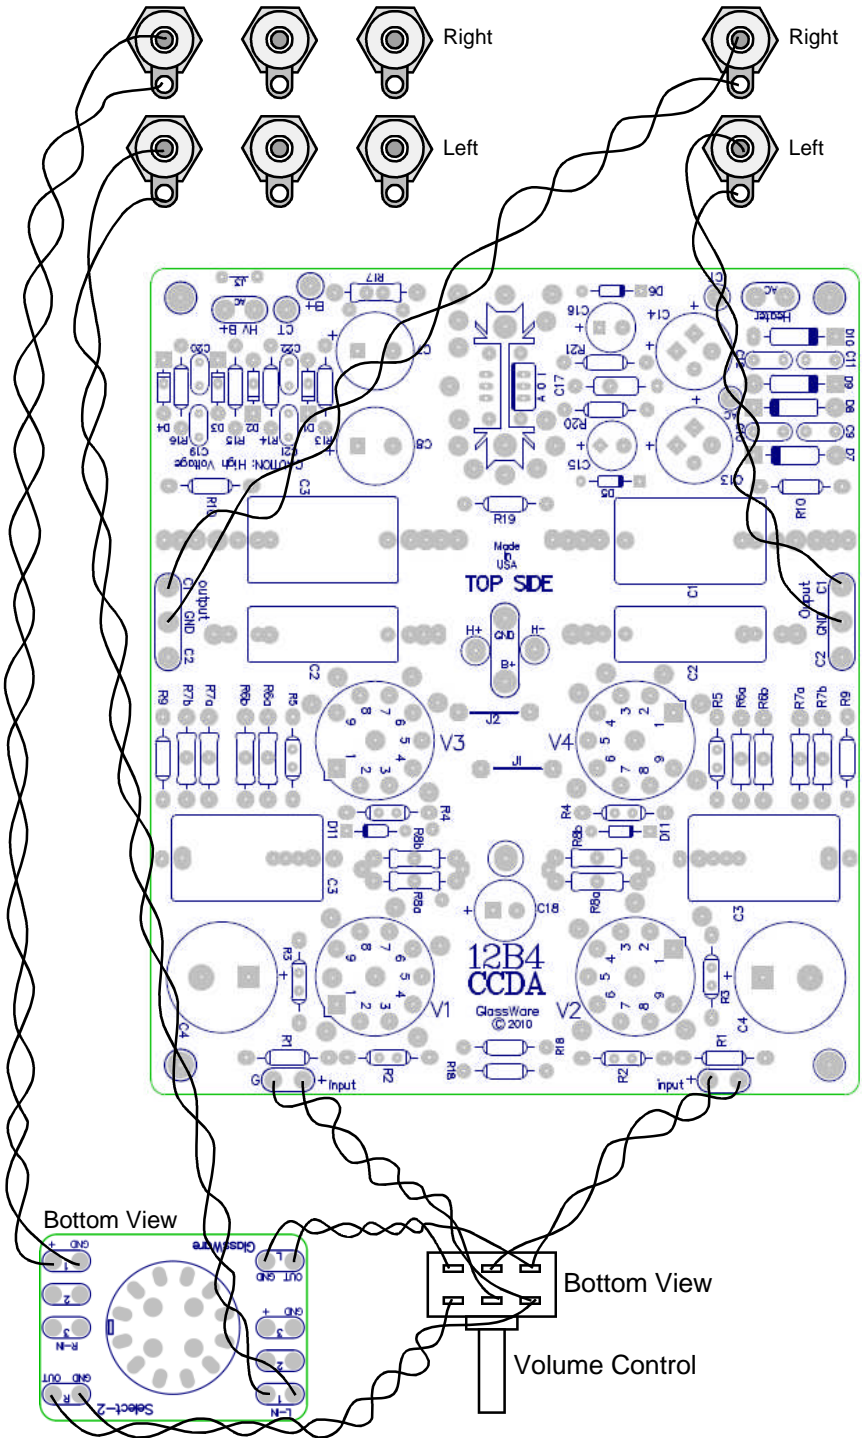

## Configuring a 12B4 CCDA Line Amplifier

The 12B4 CCDA topology makes a good line amplifier, as it offers low distortion and a fairly low output impedance. The following design examples are by no means exhaustive, as many more equally "correct" configurations are possible.

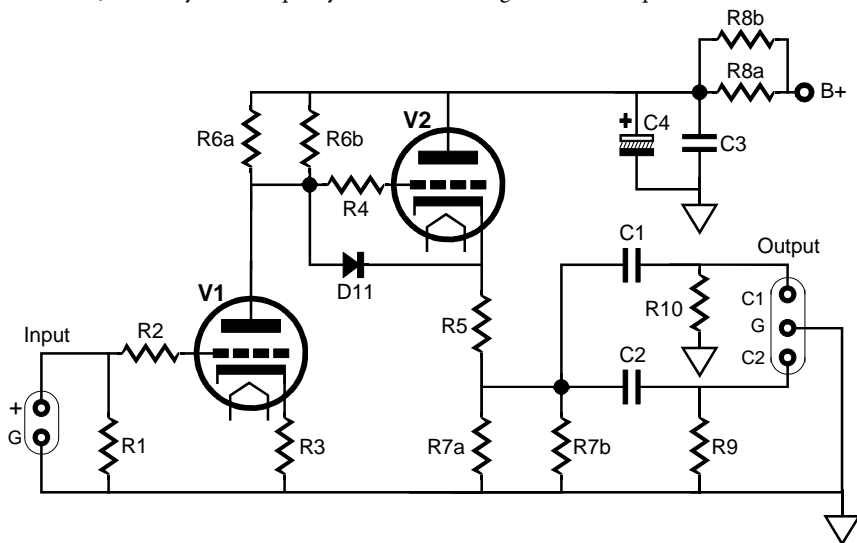

### Typical Part Values ( ) Parentheses denote recommended values

B+ =	100V	150V	200V	250V	300V
(at tubes)					
R1,9,10 =	1M	1M	1M	1M	1M
R2,4 =	100-1k (300)	100-1k (300)	100-1k (300)	100-1k (300)	100-1k (300)
R3,5 =	100	270	470	820	1150
R6,7 =	2.15k 2W	3.4k 2W	5k 3W	7.5k 3W	10k 3W
Iq =	23mA	22mA	20mA	17mA	15mA
C1,2 =	0.1 - 10μF*	Same	Same	Same	Same
C3 =	0.1 - 1μF*	"	"	"	"
C4 =	270μF/200V	270μF/200V	150μF/400V	150μF/400V	150μF/400V
C7,8 =	220μF/200V	220μF/200V	47μF/450V	47μF/450V	47μF/450V

\*Voltage rating must equal or exceed B+ voltage

## RC Power-Supply Filter


The 12B4 CCDA kit supplies 24 resistors for R8 (R8a & R8b in parallel): six pairs of 3W resistors for R8 use: 1.6k, 2k, 3k, 3.9k, 6.8k, 10k, and six pairs of 1W resistors, 100, 200, 300, 470, 680, and 1k. The charts on the back inside cover show the voltage/current maximums for the resistors and the voltage drop across the resistors versus current flow. Remember each channel gets its own R8 resistor. For example, a 12B4 CCDA line-stage amplifier might run each tube with 20mA of idle current, for a total of 40mA per channel. So by looking up the 40mA column, we can see the resulting voltage drops. Thus, one 1k resistor will drop 40V; thus, a 290Vdc raw DC power supply with 1k R8 resistors would deliver 250Vdc to the tubes. To prevent risking damage to the resistors, avoid running resistors near the excessive current and voltage limits.

## B-Plus Power Supply

The high voltage B-plus power supply resides on the 12B4 CCDA PCB. It contains a full-wave bridge rectifier circuit and reservoir capacitor, which is then followed by an RC power-supply smoothing filter. The power transformer is external to the PCB and can be mounted in, or outside, the chassis that houses the PCB. The optimal B-plus voltage depends many factors. For example, the 12B4 can draw a good deal of current at relatively low plate voltages and can withstand much higher plate voltage than other small triodes, so a B+ range of 100V to 300V. The sky is not the limit here, as the power supply capacitors and the heater-to-cathode voltage set an upward limit of about 350V for the power supply voltage after the rectifiers and about 300V at the tubes after the RC filter.

An analogy can be made between cars and a tube line-stage amplifier. A race car runs high revs and high horsepower and it is obscenely expensive, noisy, unreliable, and glorious to behold. A family's commuter car is cheap, quiet, reliable, and boring. Running high voltage and high current will make for a short tube life and a wonderful sound. Running low voltage and low current will greatly extend tube life and save money on part cost. For example, a typical 200V capacitor is much more volumetrically efficient and cheaper than a 400V capacitor. Thus, running a lower B-plus voltage allows us to increase greatly the total capacitance in the power supply, at a lower cost, which will lower power-supply noise at the output. Unlike the Aikido circuit, which nulls its power-supply noise at its output, the CCDA circuit only offers a -6dB reduction of power-supply noise at its output.


My recommendation is to use a 120Vac secondary that will establish a 165V to 170V raw DC voltage after the rectifiers, which will then fall to about 120V to 150V after the two RC filters; and to run the 12B4s under a high idle current, say 23mA ( $R_k = 220$ ,  $B+ = 140V$ ,  $R_a = 3k$ ). Or use a 240Vac secondary that will establish a 330V to 340V raw DC voltage, which will then fall to about 250V to 300V after the RC filters; and to run the 12B4s under a lower idle current, say 15mA ( $R_k = 1150$ ,  $B+ = 300V$ ,  $R_a = 10k$ ). Resistors R8a & R8b are in parallel and they form the series resistor in the RC power supply filter with capacitors C4 & C5. Resistor heat equals  $I^2 \times R$  (and  $V^2/R$ ); for example, 20mA and 5k will dissipate 2W. See page 12 and the back inside cover for more information.

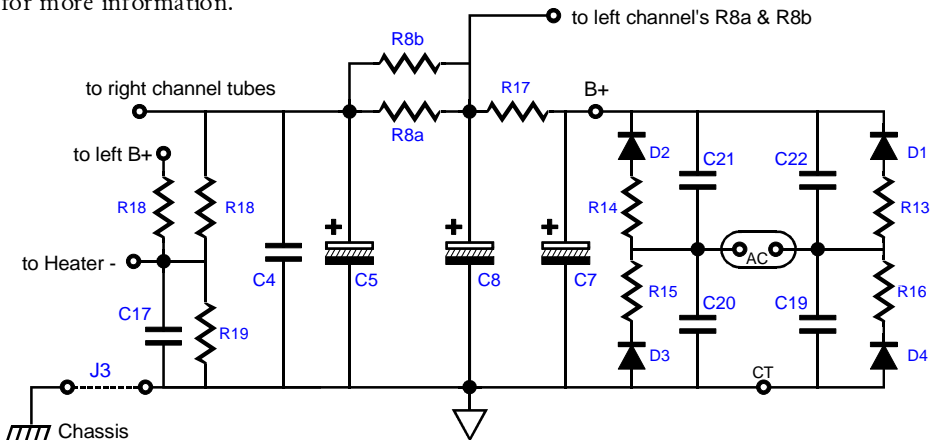

## Power Transformer(s)

The 12B4 CCDA PCB requires a power transformer(s) to energize its two power supplies. The heater power supply power transformer must offer at least 1.8 times more current than the heaters will draw. For example, four 12B4s will draw 1.2A @12.6v, so the heater power transformer must be able to sustain an AC 2.16A current draw (2.5A is good choice). In addition, with sine waves, the AC voltage equals the peak voltage divided by the square root of 2, i.e. 1.414. Thus, a 10Vac sine wave peaks at 14.14V; a 6.3Vac, 8.9V. In other words, a sine wave that peaks at 14.14V will produce the same amount of heat in a resistance as a 10Vdc voltage source would produce in the same resistance; thus, we label the 14.14Vpk sine wave as being 10Vac. Thus, in order to get the 16Vdc raw DC voltage that a 12.6V heater voltage regulator requires an input voltage equal to remainder of 16V minus the rectifier loss (about 2V) divided by 1.414, which is roughly 12.6Vac.

The high voltage power transformer must also follow the same rules. Thus, to achieve 300V of raw DC voltage, the transformer primary must deliver  $(300V + 2V) / 1.414$ , or about 214Vac. And if 50mA is required, the power transformer must be rated for 50mA x 1.8 (in a full-wave bridge rectifier circuit), or 90mA. Thus, such a transformer VA rating would be rated about 20VA, as  $0.9 \times 214 = 19.71$ .

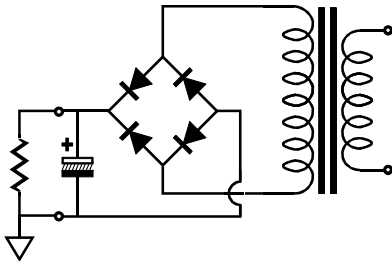


$$I_{out} = I_{ac} / 1.8$$

$$V_{dc} = (V_{ac} \times 1.4) - 2V_{diode}$$

**Full-Wave Bridge** This is the most popular power supply configuration. The entire primary winding is used and four rectifiers are required. This configuration is seldom used with tube rectifiers, as the rectifier cathodes cannot be heated by just a single heater winding. The two solid-state diode voltage-drops count for little in a high-voltage power supply, but are a big liability in low-voltage power supplies. DO NOT USE CENTER-TAP PAD.

A center-tapped primary can be used as well; just leave D3, D4, R12, and R13 off the board, then attach the center-tap to D3 or D4's bottom eyelet, where its label appears.

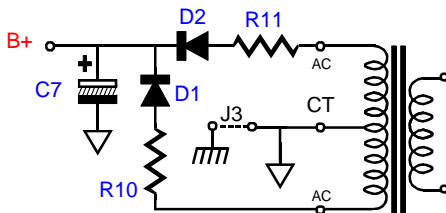

### Center-Tapped Transformer

$$I_{out} = I_{ac} / 1.27$$


$$V_{dc} = V_{ac}^* / 1.43 - V_{diode}$$

\*entire primary

## Heater Issues

The 12B4 CCDA PCB holds the heater raw power supply and voltage regulator. The regulator uses the LD1085 low-dropout adjustable voltage regulator. The regulator must be set to an output voltage 12V or 12.6V, as all the tube heater elements are in parallel. **Jumpers J1 & J2 must be used.**

**AC Heaters** An AC heater power supply (12Vac or 12.6Vac) can be used, if the heater rectifiers, power supply capacitors, and regulator are all left off the board. This is not in the least recommended, as the high-current AC voltage will introduce hum and compromise the bass reproduction.

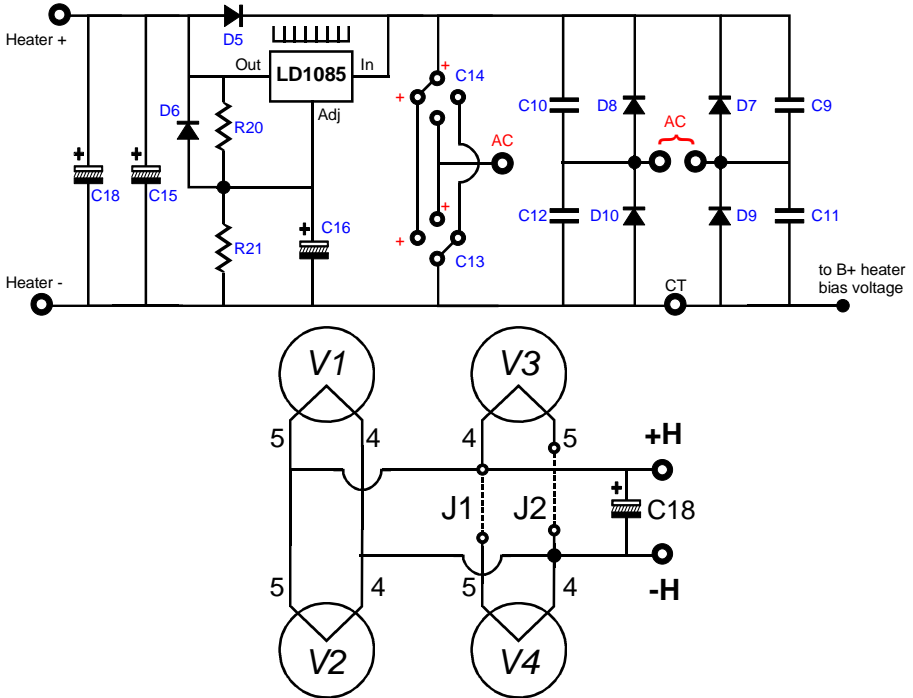

## Heater Regulator Typical Part Values

Heater Voltage = 12V

R16 = 1.07k

R17 = 124

D5 - D8 = MUR410G

D9, 10 = 1N4007

C8 - C9 = 0.01 $\mu$ F - 50V

C12 = 10k $\mu$ F - 16V

C13, C14 = 1k $\mu$ F - 16V

C18 = 470 $\mu$ F - 3.3k $\mu$ F 16V

12.6V

1.13k

same

"

"

"

"

"

"

**Regulator** = LD1085, LM317, LM350, LT1085


**Vac Input** = 6.3Vac @ 5A for voltage doubler configuration  
12-12.6Vac @ 2.5A for 12Vdc or 12.6Vdc

Resistors R16 and R17 set the heater voltage regulator's output voltage. The formula:


$$V_0 = 1.25(1 + R_{16} / R_{17})$$

For example, using a 125-ohm resistor for R17 and a 1.07k resistor in R16 position, the output will climb to 12Vdc. See the values table above.

**Heater Reference Voltage** Since one triode's cathode sits close to ground potential and the other close to half the B+ voltage, the heater-to-cathode voltage experienced differs between triodes. The safest path is to reference the heater power supply to a voltage equal to one fourth the B+ voltage that appears after resistor R9; for example, 75V, when using a final 300V B+ voltage. The 1/4 B+ voltage ensures that both top and bottom triodes see the same magnitude of heater-to-cathode voltage. The easiest way to set this voltage relationship up is the following circuit:

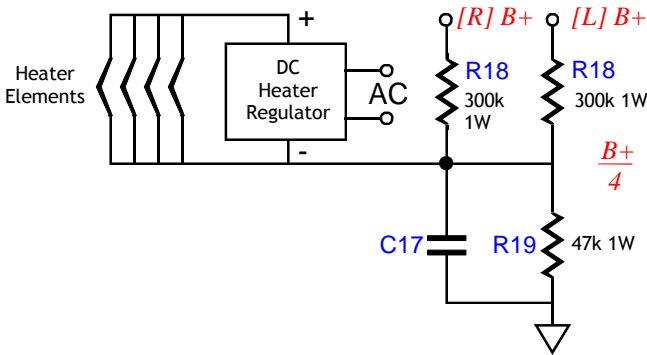

The target reference voltage for the heater's power supply is one quarter of the B-plus voltage that the 12B4 CCDA, as the tubes see, not the initial raw B-plus voltage at C6. Alternatively, you might experiment with floating the heater power supply, by "grounding" the heater power supply via only a 0.1µF film or ceramic capacitor, leaving resistors R18 and R19 off the board. The capacitor will charge up through the leakage current between heater and cathodes. Not only is this method cheap, it is often quite effective in reducing hum with certain tubes.

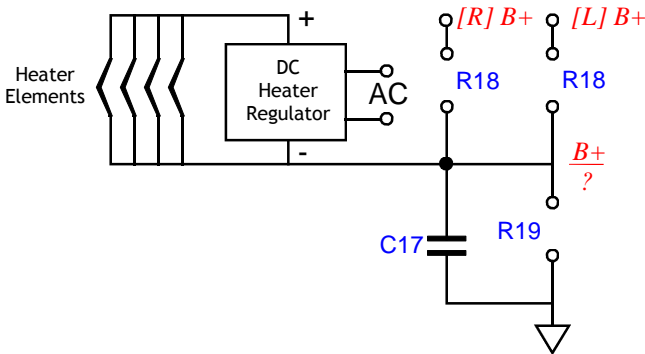

## Grounding


The 12B4 CCDA PCB holds a star ground at its center. Ideally, this will be the only central ground in the line-stage amplifier. Ground loops, however, are extremely easy to introduce. For example, if the RCA jacks are not isolated from the chassis, then the twisted pair of wires that connect the PCB to the jacks will each define a ground loop (as will jumper J3, which bridges the PCB's ground to the chassis). The solution is either to isolate the jacks or use only a single hot wire from jack to PCB (the wire can be shielded, as long as the shield only attaches at one end). Thus, the best plan is to plan. Before assembling the line-stage amplifier, stop and decide how the grounding is going to be laid out, then solder.

Three different schools of thought hold for grounding a piece of audio gear. The Old-School approach is to treat the chassis as the ground; period. Every ground connection is made at the closest screw and nut. This method is the easiest to follow and it produces the worst sonic results. Steel and aluminum are poor conductors.

The Semi-Star ground method uses several ground "stars" that are often called spurs, which then terminate in a single star ground point, often a screw on the chassis. This system can work beautifully, if carefully executed. Unfortunately, often too much is included in each spur connection. For example, all the input and output RCA jacks share ground connection to a long run of bare wire, which more closely resembles a snake than a spur ground. In other words, the spurs should not be defined just physical proximity, but signal transference. Great care must be exercised not to double ground any spur point. For example, the volume control potentiometer can create a ground loop problem, if both of its ground tabs are soldered together at the potentiometer and twisted pairs, of hot and cold wires, arrive at and leave the potentiometer, as the two cold wires attaching to the PCB will define a ground loop.

The Absolute-Star grounding scheme uses a lot of wire and is the most time consuming to execute, but it does yield the best sonic rewards. Here each input signal source and each output lead gets its own ground wire that attaches, ultimately, at one star ground point; each RCA jack is isolated from the chassis. The 12B4 CCDA PCB was designed to work with this approach, although it can be used with any approach.

**House Ground** The third prong on the wall outlet attaches to the house's ground, usually the cold water pipe. The line-stage amplifier can also attach to this ground connection, which is certainly the safest approach, as it provides a discharge path should the B+ short to the chassis. Unfortunately, this setup often produces a hum problem. Some simply float the ground, others use several solid-state rectifiers in parallel to attach the chassis ground to the house ground (**NOT NEUTRAL**) via the third prong, and others still use a 10-ohm resistor shunted by a small capacitor, say  $0.001\mu\text{F}$  to  $0.1\mu\text{F}/250\text{V}$ .

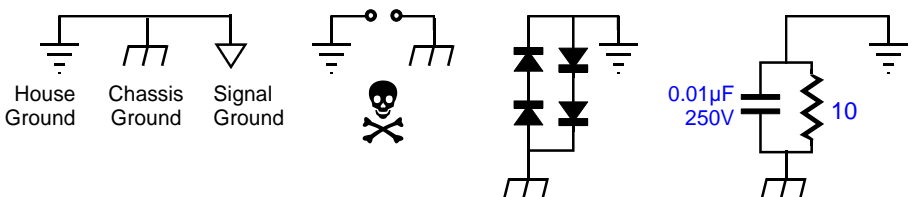

A good test procedure is to detach all the signal inputs and all the output connection from the line-stage amplifier. Then measure the AC voltage between the line-stage amplifier's chassis and the house's ground. If it reads more than a few volts, try reversing the line-stage amplifier's plug as it plugs into the wall socket. Use which ever orientation that results in the lowest AC voltage reading. Then measure the chassis ground to the first signal source's ground (while the signal source is turned on). Once again flip the signal source's plug until the lowest AC voltage setting is found. Then do the rest with the rest of the system. The results can prove far more satisfying than what would be yielded by buying thousand-dollar cables.


**RFI** Radio frequency interference can be a hassle to track down and eliminate. First make sure that the source of the problem actually resides in the line-stage amplifier. For example, if only one signal source suffers from RFI noise, make sure that it is normally RFI free. In other words, attach it to another line-stage amplifier and see if the RFI persists. If it does pass this test, then try soldering small capacitors, say 100pF, from this signal source's RCA jacks to the chassis, as close as possible to the jacks: if it fails, fix the source.

Ferrite beads can also help; try using beads on the hot lead as it leaves the RCA jack and then again at the selector switch. Increasing the grid-stopper resistor's (R2) value, say to 1k, can also work wonders (use a carbon-composition or bulk-foil resistor or some other non-inductive resistor type).

**Terminating Resistors** Here's a cheap trick to try: at each input RCA jack, place a 100k to 1M resistor, bridging input hot and jack ground. Why? The resistor provides a path for the AC signal present at the jack, so given a choice between radiating into the chassis or going through the relatively low-impedance resistor, the AC signal chooses the latter path, reducing crosstalk.

**Chassis Ground** Jumper J3 connects the PCB's ground to the chassis through the top leftmost mounting hole. If you wish to float the chassis or capacitor couple the chassis to ground, then either leave jumper J3 out or replace it with a small-valued capacitor (0.01 to 0.1 $\mu$ F). Warning: if rubber O-rings are used with PCB standoffs, then the ground connection to the chassis is not likely to be made; tubes, use metal washer in place of top O-ring.

**CATV Ground** Attaching a line-stage amplifier to TV or VCR can cause huge hum problems, as the "ground" used by the connection CATV connection may introduce hum. Isolation transformers work supremely well in this application. In fact, an isolation transformer can be used on all the input signals only (one transformer per channel is required, if it is located after, rather than before the selector switch.) Look on the Web for more complicated solutions to the CATV hum problem.

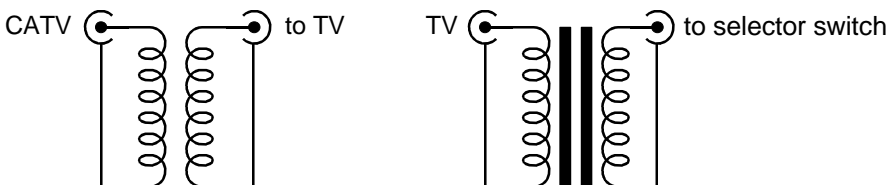

# 12B4 Data

The 12B4-A is a miniature low-mu triode designed primarily for service as a vertical-deflection amplifier in television receivers. The tube features high plate current at relatively low plate voltages and is capable of withstanding the high pulse voltages normally encountered in this application.

## CHARACTERISTICS AND TYPICAL OPERATION

<b>CLASS A<sub>1</sub> AMPLIFIER</b>		
Plate Voltage .....	150	150 Volts
Grid Voltage .....	-23	-17.5 Volts
Amplification Factor .....	—	6.5
Plate Resistance, approximate .....	—	1030 Ohms
Transconductance .....	—	6300 Micromhos
Plate Current .....	9.6	34 Milliamperes
Grid Voltage, approximate .....	—	-32 Volts
$I_b = 200$ Microamperes .....	—	

## ELECTRICAL



Cathode—Coated Unipotential	<b>Series</b>	<b>Parallel</b>
Heater Voltage, AC or DC .....	12.6	6.3 Volts
Heater Current .....	0.3	0.6 Amperes
Heater Warm-up Time* .....	—	11 Seconds
Direct Interelectrode Capacitances, approximate		
Grid to Plate .....	4.8	$\mu\mu\text{f}$
Input .....	5.0	$\mu\mu\text{f}$
Output .....	1.5	$\mu\mu\text{f}$

## MECHANICAL


Mounting Position—Any  
 Envelope—T-6½, Glass  
 Base—E9-1, Small Button 9-Pin

## MAXIMUM RATINGS

	Class A <sub>1</sub> Amplifier	Vertical-Deflection Amplifier†
DC Plate Voltage .....	550	550 Volts
Peak Positive Pulse Plate Voltage .....	—	1000§ Volts
Peak Negative Grid Voltage .....	—	250 Volts
Plate Dissipation .....	5.5	5.5 $\pi$ Watts
DC Cathode Current .....	—	30 Milliamperes
Peak Cathode Current .....	—	105 Milliamperes
Heater-Cathode Voltage		
Heater Positive with Respect to Cathode		
DC Component .....	100	100 Volts
Total DC and Peak .....	200	200 Volts
Heater Negative with Respect to Cathode		
Total DC and Peak .....	200	200 Volts
Grid Circuit Resistance		
With Fixed Bias .....	0.47	— Megohms
With Cathode Bias .....	2.2	2.2 Megohms

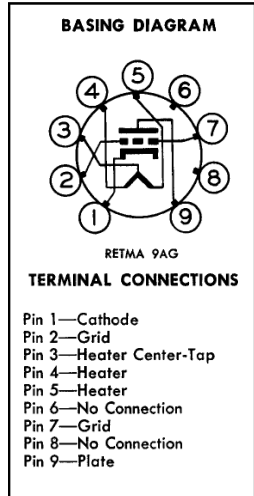

## AVERAGE PLATE CHARACTERISTICS

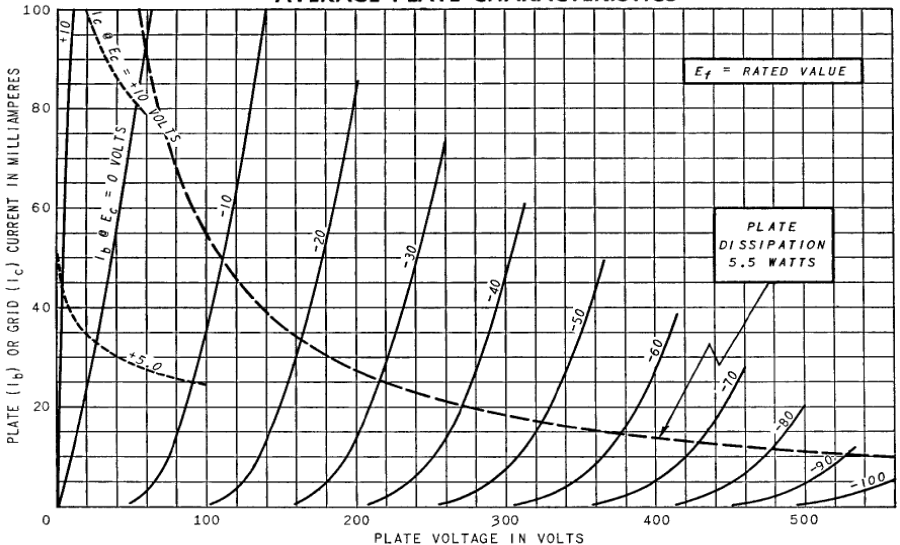

## Coupling-Capacitor Values

The bigger in value the coupling capacitor, the lower the -3dB high-pass corner frequency will be. The formula is as follows:


$$\text{Frequency} = 159155/C/R$$

where C is in  $\mu\text{F}$ . For example, with a  $1\mu\text{F}$  coupling capacitor and a power amplifier with an input impedance of 47k, the corner frequency would be 3.5Hz. The higher the load impedance, the lower the corner frequency. The coupling capacitor voltage rating must at least equal the B+ voltage, for safety's sake. Bypass capacitor (C15) for the coupling capacitors (C1) is optional. Many coupling capacitor benefit from the addition of small bypass capacitors that are one tenth to one hundredth the main coupling capacitor's value. Do not be afraid to experiment. Try bypassing a film coupling capacitor with a PIO (or mica or wet-slug tantalum or Teflon) capacitor.

## Dual Coupling Capacitors

The boards hold two coupling capacitors, each finding its own 1M resistor to ground. Why? The idea here is that you can select (via a rotary switch) between C1 or C2 or both capacitors in parallel. Why again? One coupling capacitor can be Teflon and the other oil or polypropylene or bee's wax or wet-slug tantalum.... As they used to sing in a candy bar commercial: "Sometimes you feel like a nut; sometimes you don't."

Each type of capacitor has its virtues and failings. So use the one that best suits the music; for example, one type of coupling capacitors for old Frank Sinatra recordings and the other for Beethoven string quartets. Or the same flavor capacitor can fill both spots: one lower-valued capacitor would set a low-frequency cutoff of 80Hz for background or late night listening; the other higher-valued capacitor, 5Hz for full range listening. On the other hand, each coupling capacitor can feed its own output, for example, one for low-frequency-limited satellites and one for subwoofers. Or if you have found the perfect type of coupling capacitor or the perfect small bypass capacitor, the two coupling capacitor could be hardwired together on the PCB (via a jumper across the capacitor pads).

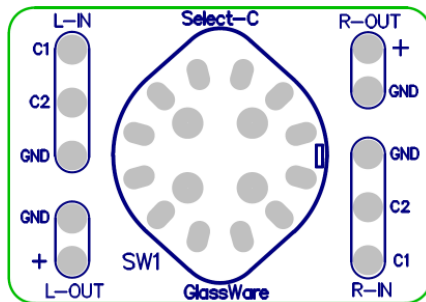

### GlassWare Capacitor Selector Switch

The GlassWare Select-C selector switch and PCB makes wiring up a 12B4 board an easy task, as the two coupling capacitor outputs from each channel of the 12B4 CCDA attach to the small PCB and the two outputs leaving the switch allow choosing between coupling capacitors C1 or C2 or both C1 and C2 in parallel.

## Assembly & Testing

**Assembly** Cleanliness is essential. Before soldering, be sure to clean both sides the PCB with 90% to 99% isopropyl alcohol. Do not use dull-looking solder; solder should shine. If it doesn't, first clean away the outer oxidation with some steel wool or a copper scouring pad. If the resistor leads look in the least gray, clean away the oxidation with either steel wool or a wire snip's sharp edges. Admittedly, with new resistors and a fresh PCB, such metal dulling is rare; but if the parts have sat in your closet for a year or two, then expect a good amount of oxidation to have developed.


First, solder all the small diodes in place, and then solder the resistors, rectifiers, capacitors, and heatsinks. Be consistent in orienting the resistors; keep all the tolerance bands on the resistor's body at the right side as you face the resistor straight on. This will pay dividends later, if you need to locate a soldered a resistor in the wrong location. Because the board is double sided, with traces and pads on each side, it is easier to solder the resistors from their top side. It is often easier to attach the LD1085 (heater regulator) to its heatsink first (using the heatsink hardware kit) and then to solder both the heatsink and regulator to the PCB at once. As the PCB is so overbuilt, it is extremely difficult to remove an incorrectly placed part. Be sure to confirm all the electrolytic capacitor orientations, as a reversed polarized capacitor can easily vent (or even explode) when presented with high-voltage. Confirm twice, solder once.

**Testing** Before testing, visually inspect the PCB for breaks in symmetry between left and right sides. Wear safety eye goggles, which is not as pantywaist a counsel as it sounds, as a venting power-supply capacitor will spray hot caustic chemicals. Make a habit of using only one hand, with the other hand behind your back, while attaching probes or handling high-voltage gear, as a current flow across your chest can result in death. In addition, wear rubber-soled shoes and work in dry environment. Remember, safety first, second, and last.

1. Attach only the heater power supply's transformer winding, leaving the high-voltage transformer leads unattached and electrical tape shrouded, with no tubes in their sockets.
2. Use a variac and slowly bring up the AC voltage, while looking for smoke or part discoloration or bulging.
3. Measure the heater regulator's output voltage without and with a load. If the heater regulator fails to regulate, try either lowering the heater voltage a tad, for example 12V instead of 12.6V, as the 0.6V difference might be enough to bring the regulator back into regulation.
4. Next, power down the heater regulator and attach the high-voltage windings and insert the tubes in their sockets.
5. Attach the transformer to a variac and slowly bring up the AC voltage.
6. Measure the voltage across ground and B-plus pads in the center of the PCB; then measure the voltage across capacitors, C3 & C4. If the two channels differ by more than 10Vdc, try switching tubes from one channel to the other. If the imbalance does not follow the tubes, there is a problem, probably a misplaced part.

Only after you are sure that both heater and B-plus power supplies are working well, should you attach the line-stage amplifier to a power amplifier.

### Top Side PCB Mechanical Layout

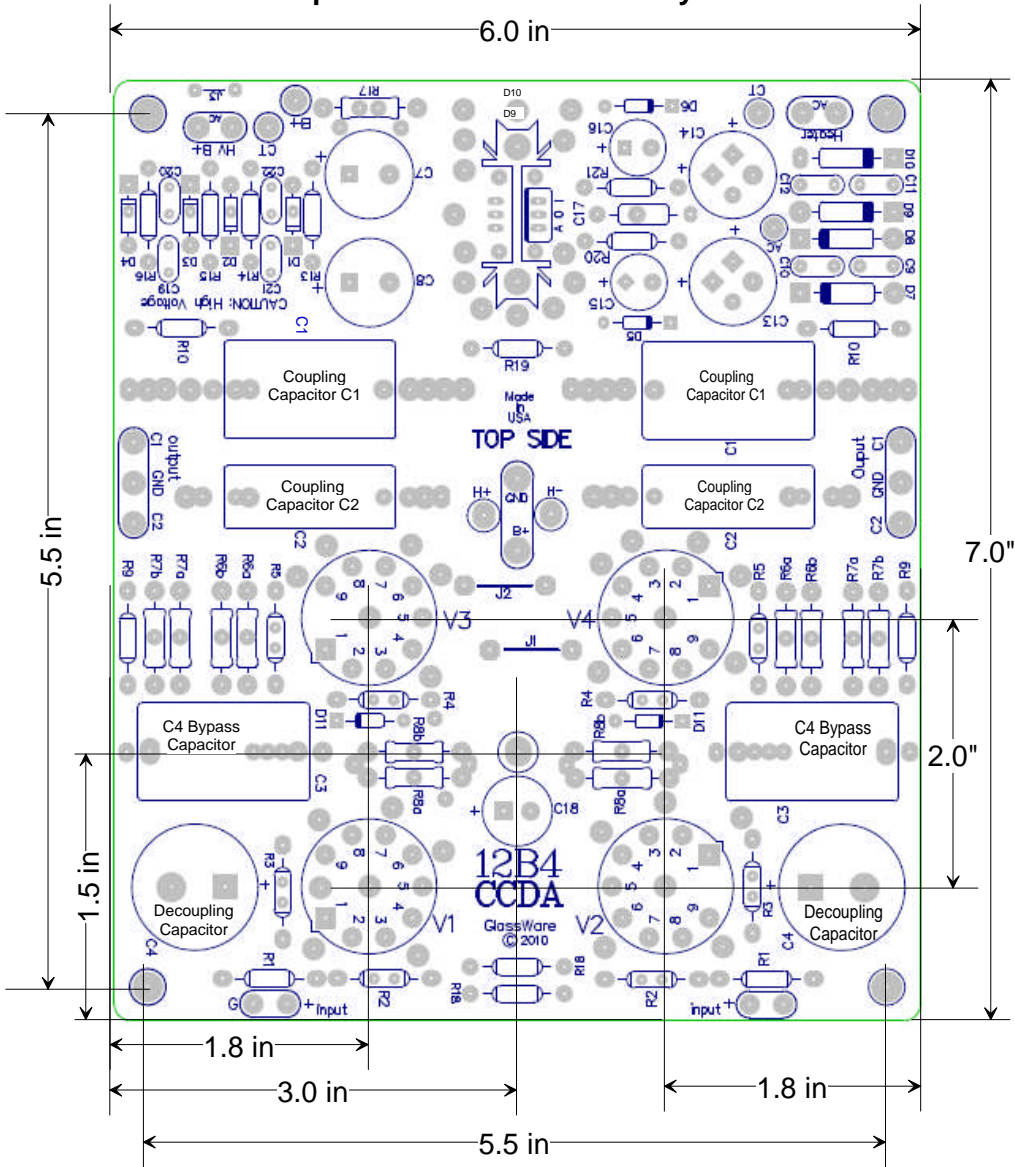

### Let me know what you think

If you would like to see some new audio PCB or kit or recommend a change to an existing product or if you need help figuring out the heater jumper settings or cathode resistor values, drop me a line by e-mail to the address on the back cover (begin the subject line with either "Aikido" or "tube" or the spam filters are sure to eat your message).

R9	I <sub>max</sub> mA	V <sub>max</sub>	Wattage	F3 150µF	F3 270µF
100	100mA	10V	1W	10.61Hz	5.89Hz
200	70mA	14V	1W	5.31Hz	2.95Hz
300	57mA	17V	1W	3.54Hz	1.96Hz
470	46mA	21V	1W	2.26Hz	1.25Hz
680	38mA	25V	1W	1.56Hz	0.87Hz
1000	31mA	31V	1W	1.06Hz	0.59Hz
1600	43mA	69V	3W	0.66Hz	0.37Hz
2000	39mA	77V	3W	0.53Hz	0.29Hz
3000	32mA	95V	3W	0.35Hz	0.2Hz
3900	28mA	108V	3W	0.27Hz	0.15Hz
6800	21mA	143V	3W	0.16Hz	0.09Hz
10000	14mA	170V	3W	0.11Hz	0.06Hz

Resistor	Voltage Drop Against Current									
	1	2	3	4	5	6	7	8	9	10
100	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
200	0.20	0.40	0.60	0.80	1.00	1.20	1.40	1.60	1.80	2.00
300	0.30	0.60	0.90	1.20	1.50	1.80	2.10	2.40	2.70	3.00
470	0.47	0.94	1.41	1.88	2.35	2.82	3.29	3.76	4.23	4.70
680	0.68	1.36	2.04	2.72	3.40	4.08	4.76	5.44	6.12	6.80
1000	1.00	2.00	3.00	4.00	5.00	6.00	7.00	8.00	9.00	10.00
1600	1.6	3.2	4.8	6.4	8.0	9.6	11.2	12.8	14.4	16.0
2000	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0
3000	3.0	6.0	9.0	12.0	15.0	18.0	21.0	24.0	27.0	30.0
3900	3.9	7.8	11.7	15.6	19.5	23.4	27.3	31.2	35.1	39.0
6800	6.8	13.6	20.4	27.2	34.0	40.8	47.6	54.4	61.2	68.0
10000	10.0	20.0	30.0	40.0	50.0	60.0	70.0	80.0	90.0	100.0

Current in mA

Resistor	Voltage Drop Against Current									
	11	12	13	14	15	16	17	18	19	20
100	1.10	1.20	1.30	1.40	1.50	1.60	1.70	1.80	1.90	2.00
200	2.20	2.40	2.60	2.80	3.00	3.20	3.40	3.60	3.80	4.00
300	3.30	3.60	3.90	4.20	4.50	4.80	5.10	5.40	5.70	6.00
470	5.17	5.64	6.11	6.58	7.05	7.52	7.99	8.46	8.93	9.40
680	7.48	8.16	8.84	9.52	10.20	10.88	11.56	12.24	12.92	13.60
1000	11.00	12.00	13.00	14.00	15.00	16.00	17.00	18.00	19.00	20.00
1600	17.60	19.20	20.80	22.40	24.00	25.60	27.20	28.80	30.40	32.00
2000	22.00	24.00	26.00	28.00	30.00	32.00	34.00	36.00	38.00	40.00
3000	33.00	36.00	39.00	42.00	45.00	48.00	51.00	54.00	57.00	60.00
3900	42.90	46.80	50.70	54.60	58.50	62.40	66.30	70.20	74.10	78.00
6800	74.80	81.60	88.40	95.20	102.00	108.80	115.60	122.40	129.20	136.00
10000	110.00	120.00	130.00	*	*	*	*	*	*	*

Current in mA

Resistor	Voltage Drop Against Current									
	21	22	23	24	25	26	27	28	29	30
100	2.10	2.20	2.30	2.40	2.50	2.60	2.70	2.80	2.90	3.00
200	4.20	4.40	4.60	4.80	5.00	5.20	5.40	5.60	5.80	6.00
300	6.30	6.60	6.90	7.20	7.50	7.80	8.10	8.40	8.70	9.00
470	9.87	10.34	10.81	11.28	11.75	12.22	12.69	13.16	13.63	14.10
680	14.28	14.96	15.64	16.32	17.00	17.68	18.36	19.04	19.72	20.40
1000	21.00	22.00	23.00	24.00	25.00	26.00	27.00	28.00	29.00	30.00
1600	33.60	35.20	36.80	38.40	40.00	41.60	43.20	44.80	46.40	48.00
2000	42.00	44.00	46.00	48.00	50.00	52.00	54.00	56.00	58.00	60.00
3000	63.00	66.00	69.00	72.00	75.00	78.00	81.00	84.00	87.00	90.00
3900	81.90	85.80	89.70	93.60	97.50	101.40	105.30	109.20	*	*
6800	142.80	*	*	*	*	*	*	*	*	*
10000	*	*	*	*	*	*	*	*	*	*

Current in mA

\* Exceeds maximum Voltage/Current

**GLASSWARE**  

---

**AUDIO DESIGN**  
**[www.glass-ware.com](http://www.glass-ware.com)**  
**[www.tubecad.com](http://www.tubecad.com)**

**[sales@glass-ware.com](mailto:sales@glass-ware.com)**

Copyright © 2011  
All Rights Reserved